

Dahua Temperature Monitoring Access Control

Temperature Monitoring/Face Recognition/Integration



Contactless

Non-contact temperature detection, temperature monitoring distance range: **0.3m – 0.8m**



High Accuracy

Temperature monitoring accuracy: **±0.3°C**



Quick Response

Face recognition time: **0.2s**
Temperature monitoring time: **0.2s**



Easy Installation



Easy to install and deploy



Good Compatibility


The temperature monitoring access control terminal can be integrated with third-party devices

Key Features

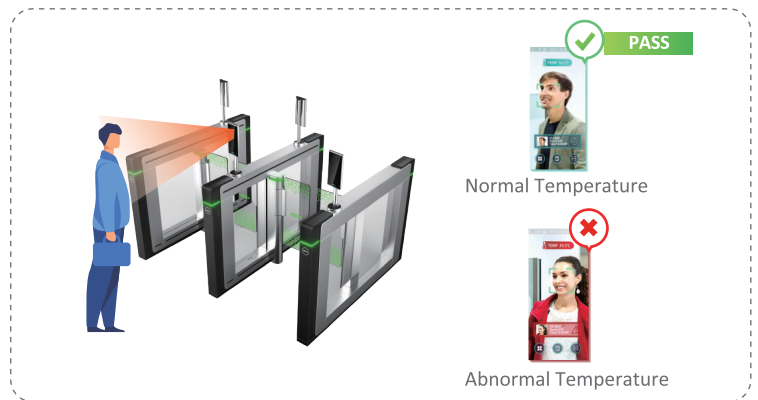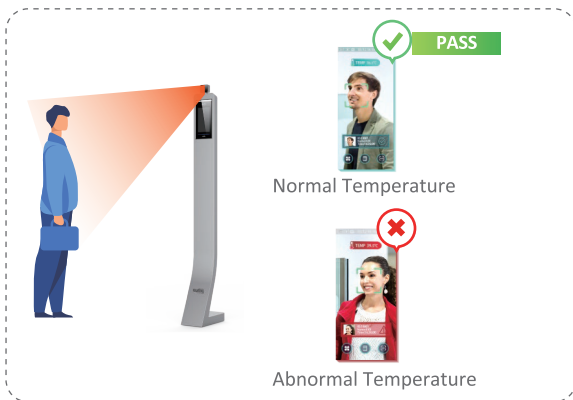

- Face recognition is integrated with body temperature monitoring, no additional staff required.
- Non-contact access to reduce cross-infection.
- Large storage of face images and temperature information for easy back-tracking.
- Fast access to prevent congestion.
- Supports third-party turnstile integration.

Application Scenario

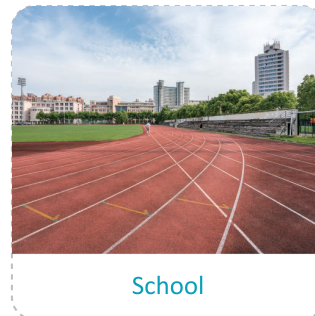

Solutions

Desk Mount : ASF072X-T1

Wall Mount: DHI-ASI7223X-A-T1

Standing Mount: DHI-ASI7223X-A-T1 + DHI-ASF172X-T1 (Bracket)

Terminal + DSS-Express

- Temperature Accuracy: $\pm 0.3^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m~0.8m
- Sound Prompt: Abnormal temperature alarm



Wall Standing Desk

DHI-ASI7223X-A-T1 + DHI-ASGB810X

Terminal + Turnstile + DSS-Express

- Temperature Accuracy: $\pm 0.3^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m~0.8m
- Sound Prompt: Abnormal temperature alarm



* Design and specifications are subject to change without notice.

